



LONDDEX

钢带
STRIP



www.ningbolondex.com



宁波隆德五金制造有限公司

宁波隆德五金制造有限公司立足于市场发展需求,不断开拓,进取与自我完善,以满足客户的一切需求为宗旨。公司同仁严格恪守该宗旨,致力于向公司合作伙伴提供我们最优质的产品,最专业的方案以及最卓越的服务。

得益于长期以来公司在钢带分条方面的丰富经验,我们能为您提供厚度在0.10mm至6.00mm,宽度在3mm至1,250mm的钢带。为客户提供精确分条的窄钢带是我们的专业所在。此外,公司配有其它设备,能提供卷绕钢带,或者钢板等,以满足客户的不同需求。

我们专注于弹簧制造业,公司有碳素钢丝和合金钢丝,线径规格为0.10mm至22.00mm,能满足一般用途弹簧和特殊弹簧的生产需求。同时我们也能提供异性钢丝,扁钢丝和直条钢丝(直条钢丝最大线径为12mm,可生产长度最长为4,000mm)。

NINGBO LONDEX INDUSTRIAL, CO. LTD.

A company must stand out because of its dynamism, its evolution and anticipation of any market development, and also for being able to satisfy all of its customers. In LONDEX we operate according to those premises, consolidating ourselves as a strong and solvent company in the sector, in order to keep inspiring the highest level of confidence throughout service and product quality, a wide product portfolio and a personalized treatment.

Our strip business is based on a wide experience in slitting ferrous and non ferrous metals from 0.10 to 6.0mm thickness and widths from 3 to 1,250mm. We are specialists in narrow strips guaranteeing tight tolerances to achieve customers' requests. Additional machines for the production of oscillate wound coils and cut-to-length strip allow us to offer the more convenient packaging for any customers' need.

We stock ferrous and non ferrous wire from \varnothing 0.10 to 22mm for all regular and special applications, highlighting the spring manufacturing industry as our main target. We also offer square, flat and straightened wire (these last ones up to \varnothing 12mm and 4,000mm length).

存储能力

STORAGE CAPACITY



专业的服务

PROFESSIONAL SERVICE



优质分条

PREMIUM SLITTING



无毛刺分条

BURRLESS SLITTING



客户定制包装

CUSTOMIZED PACKAGING



复卷钢带

OSCILLATED WOUND STRIP



CSP-精密分条钢带

CSP - PRECISION STRIP



钢带
STRIP

不锈钢
STAINLESS STEEL

高碳钢带
HIGH-CARBON STEEL

低碳钢带
LOW-CARBON STEEL

铜及铜合金钢带
COPPER AND COPPER ALLOYS

铝带
ALUMINIUM

窄钢条
NARROW STRIP

无毛刺分条
BURRLESS SLITTING

复卷钢带
OSCILLATED WOUND STRIP

客户定制包装
CUSTOMIZED PACKAGING

低碳钢丝和镀锌钢丝
LOW CARBON STEEL AND GALVANIZED STEEL STRIP

EUROPE (EN)		CHINA (GB)		JAPAN (JIS)		US	
DD11	EN 10111	08	GB/T 710	SPHD/ HR 1	G3131	CS Type B	A1011
DC01	EN 10139	DC01	GB/T 5213	SPCC	G3141	1008	A366
DC03	EN 10139	DC03	GB/T 5213	SPCD	G3141	1006	A619
DC04	EN 10139	DC04	GB/T 5213	SPCE	G3141	1006	A620
11SMn30	EN 10087	Y15	GB/T 8731	SUM 22	G 4804	1213	A29
DX51D + Z	EN 10327	DX51D + Z	GB/T 2518	-	-	CS Types A, B, C	A653

低碳钢丝表面涂层选择

Possible coatings for low carbon steel strip

镀锡层

Tin plated

电镀锌层

Electrogalvanized

锌铝涂层

Z/A coated



低碳钢可以以退火线,轻拉或者回火状态(C290-C690)交货。

Low carbon steel can be supplied in annealed and skin-passed condition (LC) or tempered (C290-C690) as per EN 10139.

中碳钢丝和高碳钢丝
MEDIUM AND HIGH CARBON STEEL STRIP

EUROPE (EN)		CHINA (GB)		JAPAN (JIS)		US	
C15E	EN 10132-2	15	GB 3522	S15C	G4051	SAE 1015	1015
16MnCr5	EN 10132-2	16MnCr	-	-	-	AISI 5115	5115
C45E	EN 10132-3	45	GB 3522	S45C	G4051	1045	A682/684
25CrMo4	EN 10132-3	30CrMo	-	SCM 420	G 4105	SAE 4130	4130
42CrMo4	EN 10132-3	42CrMo	-	SCM 440	G 4105	SAE 4140	4140
C67S	EN 10132-4	70	GB/T 1222	S65C-CSP	G4802	1065	A682/684
C75S	EN 10132-4	-	-	-	-	1074	A682/684
C85S	EN 10132-4	85	GB/T 1222	SK85-CSP	G4802	1086	A682/684
C90S	EN 10132-4	-	-	-	-	-	-
C100S	EN 10132-4	-	-	SK4-CSP	G4802	1095	A682/684
51CrV4	EN 10132-4	50CrVA	GB/T 1222	SUP 10	G4802	6150	A505/506

高碳钢丝交货状态

Supply conditions for high carbon steel

退火且轻拉

Annealed and skin-passed

LC

冷拉

Cold rolled

CR

**淬火-回火 - 马氏体型
- 贝氏体型**

 Quenched and tempered - Martensitic
- Bainitic

QT

不锈钢丝
STAINLESS STEEL STRIP

EUROPE		CHINA		JAPAN (JIS)		US	
1.4310		1Cr17Ni7		SUS 301		301	
1.4310 Mo		-		-		301 Mo	
1.4301		0Cr19Ni9		SUS 304		304	
1.4401		6Cr17Ni12Mo2		SUS 316		316	
1.4568		0Cr17Ni7Al		SUS 631		631	
1.4006		12Cr13		SUS410		410	
1.4021		20Cr13		SUS420J1		420	
1.4016		10Cr17		SUS430		430	
1.4372		-		SUS201		201	
1.4373		-		SUS202		202	

交货状态

Supply condition

退火线 Annealed

冷拉线 Cold rolled

表面处理:轻拉或者亮面

2B or 2R/BA

交货状态:硬拉,且光亮

Tempered: TR/TH

抗拉强度700至2100兆帕

- EN 10151 From C700 to C2100

低硬,半硬,冷硬,特硬

- YB/T 5310

From DY to TY

1/2硬至硬,或客户要求

- JIS 4313

From 1/2H to SEH

1/4硬至硬

- ASTM A666

From 1/4H to FH

铝带

ALUMINIUM STRIP

EUROPE EN 573 - 3	CHINA GB 3880	JAPAN JIS H4000	US
AW-1050A	1050	A 1050	1050
AW-5052	5052	A 5052	5052
AW-5083	5083	A 5082	5083
AW5754	5154	A 5154	5154

铝带交货状态:软,1/4硬,半硬,硬。牌号系列有:2XXX,3XXX,6XXX和7XXX

Aluminium strip can be supplied in soft, 1/4 hard, half hard or full hard condition.
2xxx, 3xxx, 6xxx and 7xxx series are also available.

铜以及铜合金钢带

COPPER AND COPPER ALLOYS STRIP


EUROPE	CHINA	JAPAN (JIS)	US
Cu-ETP	T2	C 1100	C11000
CuNi2Si	-	-	C64700
CuNi12Zn24	-	-	C75700
CuZn33	-	C 2680	C26800
CuZn37	H62	C 2720	C27400
CuSn6	QSn6.5-0.1	C 5191	C51900
CuSn3Zn9	-	-	C42500

铜及铜合金带材交货状态:软,半硬,硬,特硬。

Copper and copper alloys strips can be supplied in soft, half hard, hard, extra hard and spring hard and extra spring hard condition.

生产范围

PRODUCTION RANGE

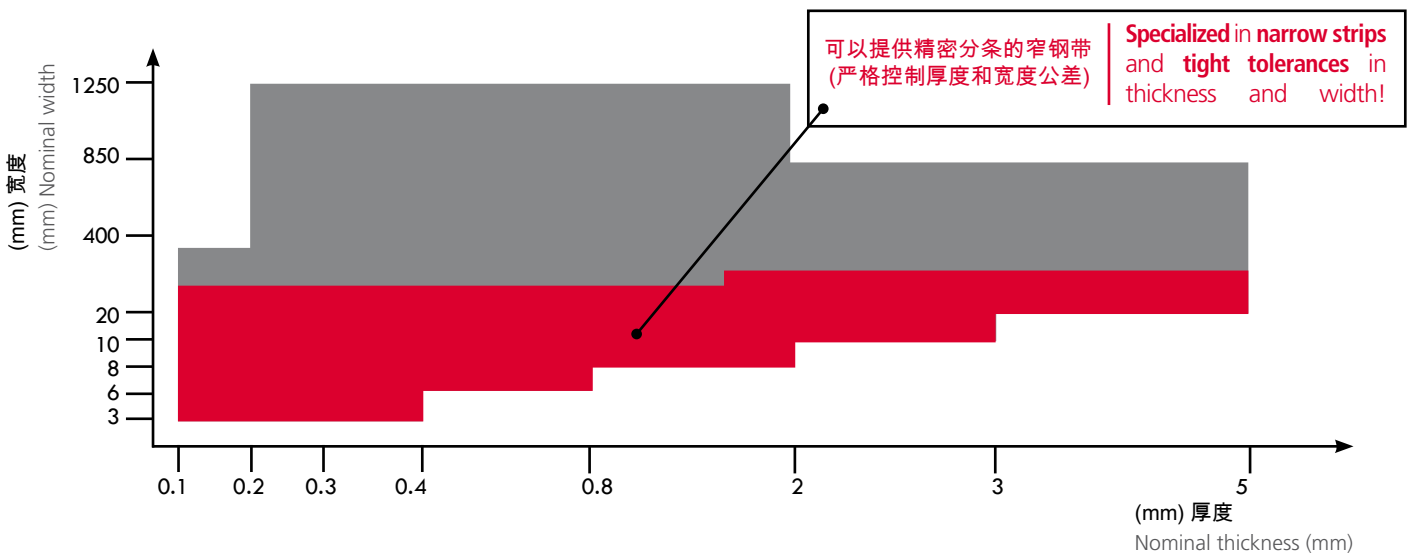

产品以单卷或者复卷式形式交货

Single or oscillated wounded coils delivery possible.

边缘

EDGES

普通分条边缘 Slit	GK		
特殊处理边缘 Special	SK	无棱角边缘 Rounded	
		圆弧边缘 Round	




复卷钢带

OSCILLATED WOUND STRIP

钢带卷绕范围

OSCILLATED COILING CAPACITY

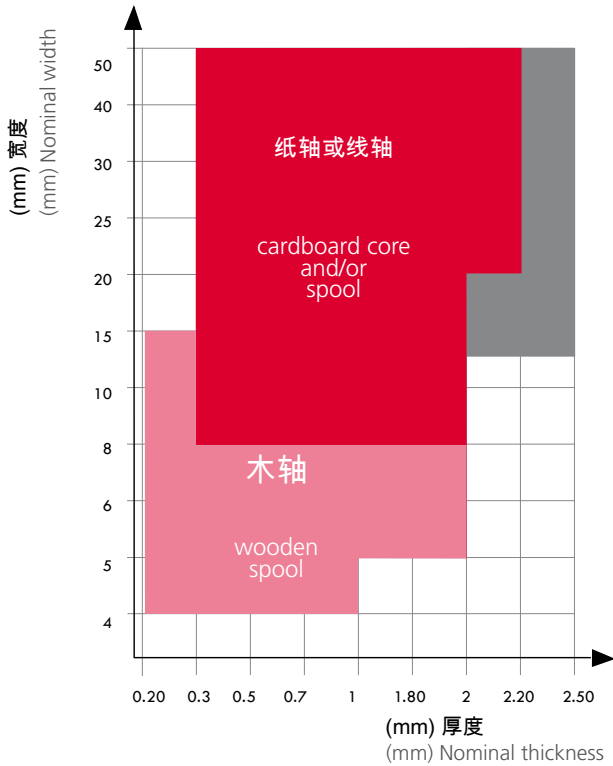

根据客户要求
As per request



线轴种类

SPOOL TYPE

	纸筒 WITH CARDBOARD CORE	木轴 ON WOODEN SPOOL
可卷绕最大宽度 Max. oscillated coiling width	500 mm	500 mm
内径 Inner diameter	300** / 400 / 500 mm	300** / 400 / 500 mm
最大外径 Maximum outside diameter	1200 mm	760 mm
最大重量 Maximum Weight	2000 kg	1500 kg

根据客户要求
As per request

包装方式

PACKAGING



钢带 STRIP



距离:

慈溪距离宁波60公里，距离杭州85公里，距离上海140公里

Distances:

CIXI - NINGBO..... 60 Km. / CIXI - HANGZHOU..... 85 Km. / CIXI - SHANGHAI..... 140 Km.



宁波隆德五金制造有限公司

NINGBO LONDEX INDUSTRIAL CO, LTD

浙江省慈溪市杭州湾新区滨海一路

First Seashore Road, Hangzhou Bay New Zone
Cixi City, Zhejiang Province China - 315336

Tel.: 86 574 63079222

Fax: 86 574 63079228

londex@ningbolondex.com

www.ningbolondex.com